

JOB:	
ITEM NO:	

# HotCube1<sub>TM</sub> INSULATED **OUTDOOR HOT CABINET MODEL HC1-UA-11**

(PATENT PENDING)

## FEATURES AND BENEFITS:

- Industry's first line of propane heated hot cabinets allowing you to hold food safely outdoors\*.
- Fully insulated holding cabinet keeps prepared foods at proper serving temperatures easily.
- · Powerful, yet efficient, proprietary propane heating system maintains the right temperature to properly hold foods utilizing 8700 BTU's of heat. Safely hold up to 200°F (93°C).
- Ample capacity to hold up to 22 steam table pans or 11 sheet pans.
- Utilizes standard 1 lb. propane tanks for up to 8 hours of hold time. Also approved for 20 lb. tank use for longer hold periods.
- Heavy duty 8" all-terrain, never-flat swivel casters, two with brakes. Rear casters are fixed to provides mobility when fully loaded, and stability during transport even in tough outdoor conditions.
- Easy visual sight glass to see propane flame.
- Piezo ignition system.
- Available body and rail custom colors or add a vinyl or magnetic door with your logo!
- Eleven sets of locking transport angles accommodate a variety of pan sizes on adjustable 1-1/2" centers. Provides capacity for up to (22) 2 x 20 steam table pans.

NOTE: Recommended for outdoor use only

Before use in altitudes greater than 7,000 feet, consult factory.



HC1-UA-11






## ACCESSORIES and OPTIONS (Available at extra cost):

- 20 lb. Hose Adapter
- Door Window
- Customized Logos/Powder Coating
- Fitted Drip Tray
- 6" Hi-Modulus Casters

See page B-30 for accessory details.



www.crescor.com

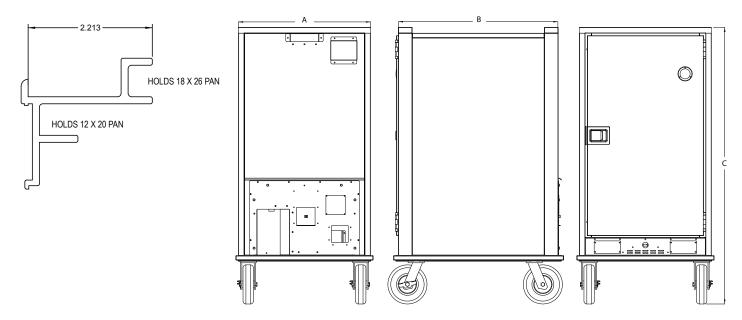

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT
	CAP/ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		ACT.
HC1-UA-11	11 SEE N	SEE NOTE	IN	28-3/4	37	60-1/8	22	27	42	LBS	408
	SETS	BELOW	MM	730	940	1527	560	690	1070	KG	185

NOTE: Pan sizes 18" x 26" (460 x 660) Bun Pans, 12" x 20" (305 x 510) Steam Table Pans.

#### **CABINET:**

- Inner body: 20 ga. stainless steel.
- · Outer body: .063 aluminum, powder coated red.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in door, back, top and sidewalls.
- Push/pull handles (2) powder coated black.
- 1-1/4" Sight glass for flame detection.

#### BASE:

- One piece construction, .060 stainless steel.
- Casters: 8" dia., (2) swivel (2) fixed, never flat, load cap. 310 lbs. each, Double ball bearings. Front casters equipped with brakes.

### DOOR:

- Formed 22 ga. stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- · Gasket: Perimeter type.
- · Thermometer: Analog.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.

## **CRES COR**®

5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267 www.crescor.com

© Crescent Metal Products, Inc. 2019 All rights reserved.

#### TRANSPORT PAN SLIDES:

- Extruded aluminum: mounted on locking lift-off posts.
- Spaced on 3" centers; adjustable on 1-1/2" centers.

#### **HOT UNIT COMPONENTS:**

- · Propane powered heating system.
- Burner: 8700 BTU's
- •Thermostat: 140°F to 200°F.

## **SHORT FORM SPECIFICATIONS**

CSA-US, CSA-C listed, CSA Sanitation, CSA Gas Canada and CSA design certified US.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.