

## INSULATED HALF-SIZE TRANSPORT CABINET MODEL 309-128C (FOR 12" X 20" PANS)

### FEATURES AND BENEFITS:

- Fully insulated half-size cabinet for transport of cold or hot foods.
- Internal frame in body and door for structural rigidity.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Safety-conscious anti-microbial latch protects against spreading germs.
- Insulated field reversible door for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latch for "easy open"; twist-lock catch secures door during transport. Latch and hinges mounted inboard.
- Removable wire pan supports for easy cleaning hold 12" x 20" pans on 2-3/4" centers.
- Interior pan stops on inside of door and back allow for proper air flow.
- Convenient lift handles fold flat against sides of cabinet.
- Heavy duty 5" swivel casters, two with brakes. Staggered mounting provides mobility when fully loaded especially over uneven surfaces.
- Cabinets can be stacked for flexibility; specify optional stacking kit.




309-128C




### ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handle
- Stacking Kit
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Kold Keepers

See page A-20 for accessory details.

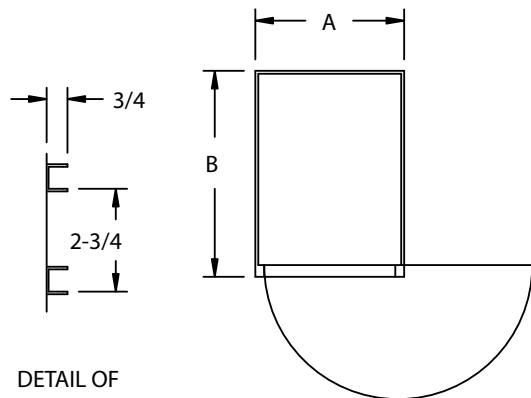

DETAIL OF PAN SLIDE

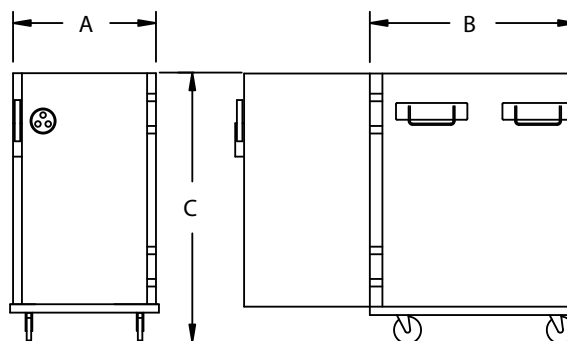

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
309-128C	8	12 x 20	IN	18-7/8	27-1/4	33-7/8	13-3/16	21-1/4	24-7/8	LBS	92
		305 x 510	MM	480	695	860	335	540	635	KG	42

NOTES: 1. When ordering bumpers, add 2" to overall dimensions.  
 2. When stacking two cabinets, width will increase to 24-5/8".

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**CABINET:**

- Body: .063 aluminum.
- Reinforcement: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in walls and door; 1" in top and bottom.
- Pan stop channels: Mounted to inside rear of cabinet and door.
- Bail handles: Two mounted to each side.

**BASE:**

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

**DOOR:**

- Field reversible.
- Formed .063 aluminum.
- Latch: Anti-microbial chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gasket: Perimeter type, silicone.
- Transport latch.
- Vent: Adjustable.

**PAN SLIDES:**

- Flat wire racks, .104 x 5/8 nickel chrome plated steel, spaced on 2-3/4" centers.

**SHORT FORM SPECIFICATIONS**

Cres Cor Insulated Half-Size Cabinet Model 309-128C. Inner, outer and top liners of .063 aluminum, reinforced with channels. Formed .063 aluminum door. Field reversible door. Fiberglass insulation in walls and door 1-1/2"; top and bottom 1". Welded and finished .190 aluminum base. Removable pan supports for (8) 12" x 20" pans on 2-3/4" centers. Two bail handles on each side. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_  
 \_\_\_\_\_ NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.