

JOB:	
ITEM NO:	

CORD CELING MOUNTED INFRA RED WARMERS IFW-66 SERIES

FEATURES AND BENEFITS:

- Flexible drop cord ceiling mounted infra red warmer. Ideal for mounting to uneven ceilings. Keeps food warm and appetizing for total customer satisfaction.
- Cord can be easily shortened.
- Supplied with shatter resistant and thermal shock resistant 250 Watt red lamp (120 Volts).
 White lamp available upon request.
- On-Off switch located at socket for convenience.
- Our standard hood style is available in your choice of four colors: Polished Brass, Polished Nickel, Black or Red.



IFW-66-10-BL






ACCESSORIES and OPTIONS (Available at extra cost):

- Shatter Proof Lamp
- ☐ 240 Volt Service

See page I-13 for accessory details.

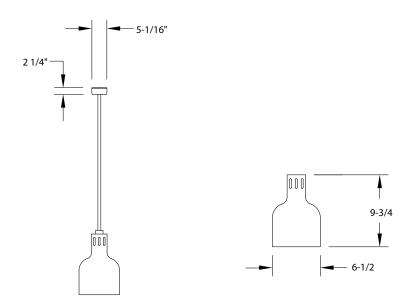

CRES COR MODEL NO. & HOOD	OVERALL LENGTH		WEIGHT ACT.	
STYLE	INCHES	MM	LBS.	KG.
IFW-66-10*	86-1/2	220	6	3

*Add color suffix:

PN = Polished Nickel

PB = Polished Brass

BL = Black

R = Red

WARMER:

- · Canopy: Spun from .051 aluminum, black anodized.
- Hanger: 16 ga. steel, 1 x 4-1/8 with slots for #10 screws; mounts canopy to customer ceiling box.
- · Cord: 6 ft., 18/3 ga., secured through strain reliefs to canopy and switch housing.
- · Switch housing: 20 ga. steel, black anodized.
- Hood: Spun from .051 aluminum; powder coat finish.
- · Units are completely wired and assembled.
- Install on 4" standard ceiling box.
- Do not mount closer than 16" above non-metallic surface for 250 Watts.

ELECTRICAL COMPONENTS:

- · Toggle switch.
- · Socket: Porcelain, pre-wired.
- · Lamp: 250 Watts, red.

POWER REQUIREMENTS:

• 250 Watts, 120 Volts, 60 Hz., single phase, 2 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Drop Cord Ceiling Mounted Infra Red Warmer
Model IFW-66-10. Hood .051 spun aluminum; powder
coat finish (color:). Six foot, 3 conductor
cord. 250 Watts, 120 Volts, 60 Hz., 1 Phase, 15 Amp.
service. 2-Year Parts / 1-Year Labor warranty. Provide
the following accessories: NSF,
CSA-US, CSA-C Listed.



5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.