

JOB:	
ITEM NO:	

NON-INSULATED EXTRUDED SIDEWALL ALLERGEN UTILITY CABINET MODEL 150-1840-AG

FEATURES AND BENEFITS:

- Comes standard with purple "Allergen-Free Zone" vinyl graphics on door.
- Non-insulated all purpose cabinet for transport and storage. Load with plastic food boxes filled with product to create your own food file.
- Same size top and base extend past sidewalls to act as natural bumpers for protection.
 Extruded frame fully welded.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Reinforced, full length door swings 270° and can be latched to the cabinet side for convenience. Card clip included.
- Gravity type latch secures door during transport.
- Interlocking extruded sidewalls hold 18" x 26" pans and plastic food boxes on 1-1/2" centers.
 Easy to clean.
- Interior pan stops on door allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes.
 Provides mobility when fully loaded.

Note: Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.



150-1840D-AG




ACCESSORIES and OPTIONS (Available at extra cost):

- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- ☐ Floor Lock (for use with 5" casters)
- Plexiglas Door
- Push Handle
- Bail Handle Kit
- Left-Hand Hinged Door
- Kold Keepers

See page A-20 for accessory details.



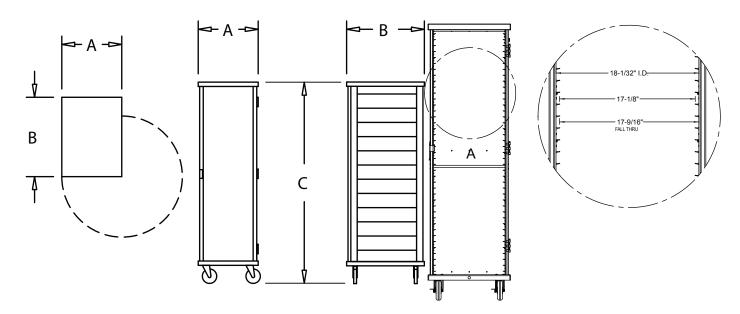

CRES COR	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT
MODEL NO.	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		ACT.
150-1840D-AG	4G 39	18 x 26	IN	20-7/8	27-1/2	69-3/4	18-1/32	26	61-1/2	LBS	125
	39	460 x 660	MM	530	700	1775	458	660	1565	KG	48

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.



CABINET:

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: Interlocking extruded 6" panels, smooth outer sides.
- Back panel: Fitted into posts, riveted to top and reinforced.
- Tie rod: Applied at front.
- Top: One piece .100 aluminum.

BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOOR:

- Panel: Formed .100 aluminum.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted horizontally to top, center and bottom.
- · Latch: Gravity type, nickel plated steel.
- Swings 270° on 3 butt hinges, riveted to posts and door.
- · Pan stop channel.

PAN SLIDES:

 Extruded interlocking side walls act as pan slides on 1-1/2" centers.

Note: Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.

SHORT FORM SPECIFICATIONS

Cres Cor Utility Cabinet Model 150-1840D-AG. Formed and welded .100 aluminum top, .190 aluminum base. Interlocking extruded aluminum sidewalls for (39) 18" x 26" pans and plastic food boxes on 1-1/2" centers. Formed .100 aluminum reinforced door. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 3-Year Parts / 1-Year Labor warranty. Provide the following . NSF listed. accessories:



5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

© Crescent Metal Products, Inc. 2018 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.