

JOB:	
ITEM NO:	

# RETRACTABLE CEILING MOUNTED INFRA RED WARMERS IFW63 SERIES

# **FEATURES AND BENEFITS:**

- Adjustable ceiling mounted infra red warmer.
  Keeps food warm and appetizing for total customer satisfaction.
- Spring tension cord reel lowers unit when needed, retracts when not in use. Two lengths available.
- Supplied with shatter resistant and thermal shock resistant 250 Watt red lamp (120 Volts).
   White shatter resistant lamp available upon request.
- On-Off switch located at socket for convenience.
- Our standard hood style is available in your choice of four colors: Polished Brass, Polished Nickel, Black or Red.



IFW6310R






# ACCESSORIES and OPTIONS (Available at extra cost):

■ 240 Volt Service

See page I-13 for accessory details.

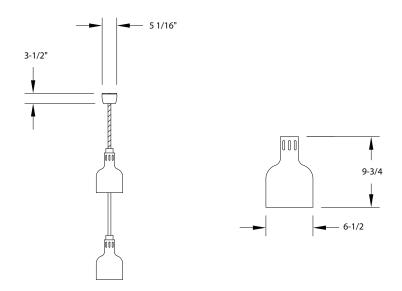

CRES COR MODEL NO. &	PULL DOWN EXTENSIONS: O.A. ADJUSTABLE LENGTHS		WEIGHT ACT.	
HOOD STYLE	INCHES	MM	LBS.	KG.
IFW6310*	30.25"-30.75" up to 65.5"	768-781 up to 1664	4	2
IFW63L10*	38.25"-38.75" up to 73.5"	972-984 up to 1867	5	2

\*Add color suffix:

PN = Polished Nickel

PB = Polished Brass

BL = Black

R = Red

## **WARMER:**

- · Canopy: Spun from .051 aluminum, black anodized.
- Hanger: 16 ga. steel, 1 x 4-15/16 with slots for #10 screws; mounts canopy to customer ceiling box.
- · Switch housing: 20 ga. steel, black anodized.
- Hood: Spun from .051 aluminum; powder coat finish.

#### **PULL DOWN ASSEMBLY:**

- Koil kord: 18/3 ga., type SJT conductor, black, 1" dia.; grounded to cable.
- Unit has positive stop in any position.
- Units are completely wired and assembled.
- Install on 4" standard ceiling box.
- Do not mount closer than 16" above non-metallic surface for 250 Watts.

## **ELECTRICAL COMPONENTS:**

- Toggle switch.
- Socket: Porcelain.
- · Lamp: 250 Watts, red. Shatter resistant.

#### **POWER REQUIREMENTS:**

•250 Watts, 120 Volts, 60 Hz., single phase, 2 Amps., 15 Amp. service.

# SHORT FORM SPECIFICATIONS

Cres Cor Retractable Ceiling Mounted Infra Red Warmer				
Model IFW63 Hood .051 spun aluminum;				
powder coat finish (color:). O.A. length:				
Canopy holds cord reel. 250 Watts, 120 Volts, 60 Hz.,				
1 Phase, 15 Amp. service. 2-Year Parts / 1-Year Labor				
warranty. Provide the following accessories:				
NSF, CSA-US, CSA-C Listed.				

5925 Heisley Road • Mentor, OH 44060-1833 Phone: 877/CRESCOR • Fax: 440/350-7267

www.crescor.com

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.